



D8

Track-Type Tractor

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

D8 Track-Type Tractor

Specifications	2	D8 Dimensions	4
Engine	2	D8 Blades	4
Service Refill Capacities	2	D8 LGP Dimensions	5
Air Conditioning System	2	D8 LGP Blades	5
Hydraulic Controls	2	Track Shoes	6
Transmission	3	Ripper	6
Standards	3	Winches	6
		Standard and Optional Equipment	7
		D8 Environmental Declaration	10

D8 Track Type Tractor – Waste Handler Configuration

Key Features and Benefits	11	D8 Waste Handler Dimensions	14
Specifications	12	D8 LGP Waste Handler Dimensions	15
Engine	12	Landfill Blades	16
Service Refill Capacities	12	Track Shoes	16
Air Conditioning System	12	D8 Waste Handler Features	17
Hydraulic Controls	12	Ripper	18
Transmission	13	Winches	18
Standards	13	Standard and Optional Equipment	19

D8 Track-Type Tractor Specifications

Engine

Engine Model	Cat® C15	
Emissions	U.S. EPA Tier 4 Final/ EU Stage V/ Korea Tier 5	
Net Power (1900 rpm)		
ISO 9249/SAE J1349	264 kW	354 hp
ISO 9249 (DIN)	359 mhp	
Maximum Power (1600 rpm)		
Engine Power: ISO 14396	294 kW	394 hp
Engine Power: ISO 14396 (DIN)	400 mhp	
Gross Power: SAE J1995:2014	294 kW	394 hp
Bore	137 mm	5.4 in
Stroke	172 mm	6.75 in
Displacement	15.2 L	928 in ³

- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator.
- Net power is tested per ISO 9249:2007 and SAE J1349:2011.
- Engine power is tested per ISO 14396:2002.
- No derating required up to 3566 m (11,700 ft) altitude, beyond 3566 m (11,700 ft) automatic derating occurs.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

Service Refill Capacities

Fuel Tank	627 L	165 gal
Diesel Exhaust Fluid Tank	24 L	6.3 gal
Cooling System	86 L	22.7 gal
Engine Crankcase*	38 L	10.0 gal
Power Train	155 L	41.0 gal
Final Drives (each)	12.5 L	3.3 gal
Roller Frames (each)	65 L	17.2 gal
Pivot Shaft Compartment	40 L	10.6 gal
Hydraulic Tank	75 L	19.8 gal

* With oil filter.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 2.5 kg of refrigerant which has a CO₂ equivalent of 3.575 metric tonnes.

Hydraulic Controls


Pump Type	Piston-type, Variable Displacement	
Pump Output (Steering)	284 L/min	75 gal/min
Pump Output (Implement)	244 L/min	64 gal/min
Tilt Cylinder Rod End Flow	132 L/min	35 gal/min
Tilt Cylinder Head End Flow	170 L/min	45 gal/min
Bulldozer Relief Valve Setting	24 000 kPa	3,480 psi
Tilt Cylinder Relief Valve Setting	24 000 kPa	3,480 psi
Ripper (Lift) Relief Valve Setting	24 000 kPa	3,480 psi
Ripper (Pitch) Relief Valve Setting	24 000 kPa	3,480 psi
Steering	43 000 kPa	6,240 psi

- Steering Pump output measured at 2,364 rpm (pump speed) and 30 000 kPa (4,351 psi).
- Implement Pump output measured at 1,900 rpm and 6895 kPa (1,000 psi).
- Electro-hydraulic pilot valve assists operations of ripper and dozer controls. A standard hydraulic system includes four valves.
- Complete system consists of pump, tank, filter, oil cooler, valves, lines, and control levers.

D8 Track-Type Tractor Specifications

Transmission

1 Forward	3.5 km/h	2.2 mph
1.5 Forward	4.8 km/h	3.0 mph
2 Forward	6.6 km/h	4.1 mph
3 Forward	11.3 km/h	7.0 mph
1.5 Reverse	4.8 km/h	3.0 mph
2.0 Reverse	6.4 km/h	4.0 mph
2.5 Reverse	8.7 km/h	5.4 mph
3.0 Reverse	11.8 km/h	7.3 mph
Drawbar Pull		
1 Forward	659.2 kN	148,200 lbf
1.5 Forward	490.8 kN	110,350 lbf
2 Forward	366.1 kN	82,300 lbf
3 Forward	205.8 kN	46,250 lbf

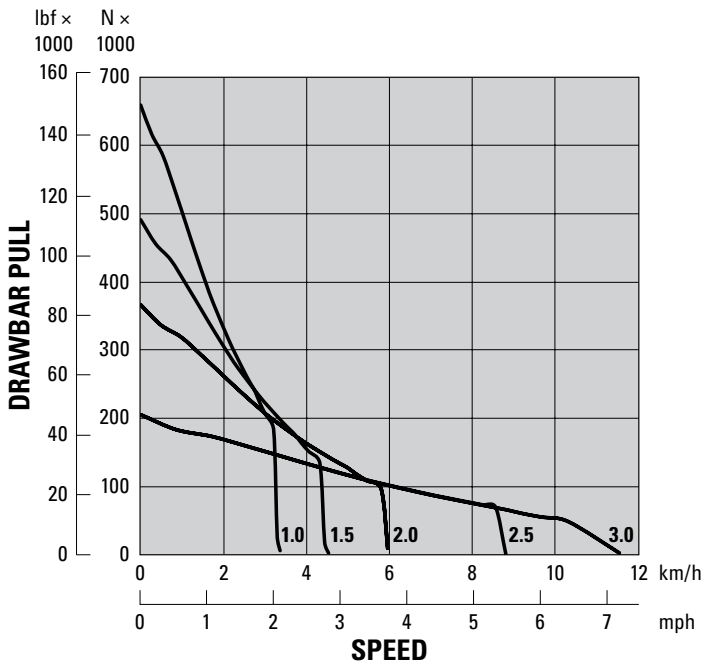

Standards

Sound Level Information

- Hearing protection may be needed when the machine is operated with an open operator station, in a noisy environment, with a cab that is not properly maintained, or when the doors and windows are open for extended periods of time.

Sound Level		Test Method	
Operator Sound Pressure Level	D8	76 dB(A) *	"ISO 6396:2008" ⁽¹⁾
Exterior Sound Pressure Level	D8	114 dB(A)	"ISO 6395:2008" ⁽²⁾
		113 dB(A) *	"ISO 6395:1988" ⁽²⁾

* Including machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that Adopt the "EU Directives"; or machines equipped with the sound-suppression package.

⁽¹⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.

⁽²⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

The sound levels listed above include both measurement uncertainty and uncertainty due to production variation.

ROPS/FOPS

- Rollover Protective Structure (ROPS) meets the following criteria: ISO 3471:2008.
- Falling Object Protective Structure (FOPS) meets the following criteria: ISO 3449:2005 Level II.

Brakes

- Crawler Machine Brake Requirements meets the following criteria: ISO 10265:2008.



D8 Track-Type Tractor Specifications

D8

Operating Weight (Single-Shank Ripper)	40 233 kg	88,698 lb
Shipping Weight	35 376 kg	77,990 lb
Ground Pressure (ISO 16754)	91.3 kPa	13.3 psi
Shoe Type	Extreme Service	
Width of Standard Track Shoe	610 mm	24 in
Shoes/Side	44	
Track Rollers per Side	8	
Ground Contact Area (ISO 16754)	4.32 m ²	6,697 in ²
1 Track Gauge	2083 mm	82 in
2 Width of Tractor (without trunnions)	2693 mm	106 in
3 Machine Height from Tip of Grouser to Exhaust Stack	3475.5 mm	136.8 in
Top of Cab*	3498.5 mm	137.7 in
Top of Guardrail	3608.5 mm	142 in
4 Length of Track on Ground	3206 mm	126 in
5 Length of Basic Tractor	4647 mm	183.0 in
With the following attachments add:		
Single Shank Ripper (with tip at ground line)	1519 mm	59.8 in
Multi-Shank Ripper (with tip at ground line)	1613 mm	63.5 in
Drawbar	406 mm	16.0 in
SU Blade	1904 mm	75.0 in
U Blade	2241 mm	88.2 in
A Blade (straight)	2027 mm	79.8 in
A Blade (angled 25 degrees)	3068 mm	120.8 in
Pitch	216 mm	8.5 in
6 Grouser Height	84 mm	3.3 in
7 Ground Clearance	622 mm	24.4 in

- Operating Weight – Includes hydraulic controls, tilt cylinder, coolant, lubricants, 100% fuel, ROPS, FOPS cab, SU-Blade, Single-Shank Ripper, 610 mm (24 in) ES shoes, and operator.
- Shipping Weight – Includes coolant, lubricants, 20% fuel, ROPS, FOPS cab, Single-Shank Ripper and 610 mm (24 in) ES shoes.

*When Cat Grade with 3D antennas are installed, overall machine height increases by approximately 50 mm (2 in).

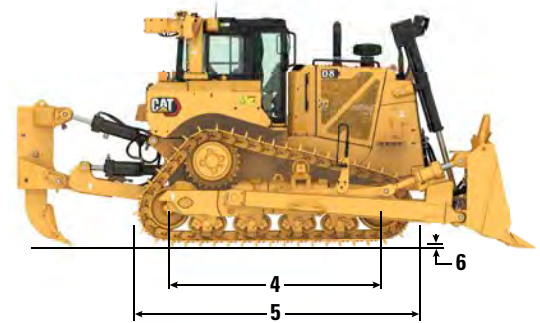

Blades – D8



	Capacity	Width*	Width Over End Bits	Height	Dig Depth	Ground Clearance	Maximum Tilt	Blade Weight* (without hydraulic controls)
	m ³ (yd ³)	mm (ft)	mm (ft)	mm (ft)	mm (in)	mm (in)	mm (in)	kg (lb)
Semi-Universal (SU)	10.3 (13.4)	3900 (12.8)	4042 (13.3)	1747 (5.7)	573 (22.56)	1255 (49.41)	895 (35.24)	4407 (9,716)
SU with Rock Guard, Wear Plate	10.3 (13.4)	3900 (12.8)	4042 (13.3)	2017 (6.6)	573 (22.56)	1255 (49.41)	895 (35.24)	4998 (11,019)
SU with Push Plate	10.3 (13.4)	3900 (12.8)	4042 (13.3)	1747 (5.7)	573 (22.56)	1255 (49.41)	895 (35.24)	4655 (10,263)
SU with FirstCut™ Cutting Edges	10.3 (13.4)	3900 (12.8)	3962 (13.0)	1747 (5.7)	573 (22.56)	1255 (49.41)	895 (35.24)	4547 (10,024)
SU with Rock Guard, FirstCut Cutting Edges	10.3 (13.4)	3900 (12.8)	3962 (13.0)	2017 (6.6)	573 (22.56)	1255 (49.41)	895 (35.24)	5130 (11,310)
Universal	11.8 (15.4)	4123 (13.5)	4265 (14.0)	1732 (5.7)	573 (22.56)	1230 (48.43)	968 (38.11)	4895 (10,792)
Universal with Rock Guard, Wear Plate	11.8 (15.4)	4123 (13.5)	4265 (14.0)	2012 (6.6)	573 (22.56)	1230 (48.43)	968 (38.11)	5454 (12,024)
Angle Blade	5.2 (6.8)	4531 (14.9)	5043 (16.5)	1177 (3.9)	625 (24.61)	1323 (52.09)	733 (28.86)	5121 (11,289)

*Includes blade tilt cylinder.

D8 Track-Type Tractor Specifications

D8 LGP

Operating Weight (drawbar)	38 513 kg	84,906 lb
Shipping Weight	33 388 kg	73,607 lb
Ground Pressure (ISO 16754)	55.3 kPa	8.0 psi
Shoe Type	Extreme Service	
Width of Standard Track Shoe	965 mm	38 in
Shoes/Side	44	
Track Rollers per Side	8	
Ground Contact Area (ISO 16754)	6.84 m ²	10,594 in ²
1 Track Gauge	2337 mm	92 in
2 Width of Tractor (without trunnions)	3302 mm	130 in
3 Machine Height from Tip of Grouser to Exhaust Stack	3475.5 mm	136.8 in
Top of Cab*	3498.5 mm	137.7 in
Top of Guardrail	3608.5 mm	142 in
4 Length of Track on Ground	3206 mm	126 in
5 Length of Basic Tractor	4647 mm	183.0 in
With the following attachments add:		
Drawbar	406 mm	16.0 in
SU Blade	1904 mm	75.0 in
A Blade (straight)	2027 mm	79.8 in
A Blade (angled 25 degrees)	3068 mm	120.8 in
Pitch	216 mm	8.5 in
6 Grouser Height	84 mm	3.3 in
7 Ground Clearance	622 mm	24.4 in

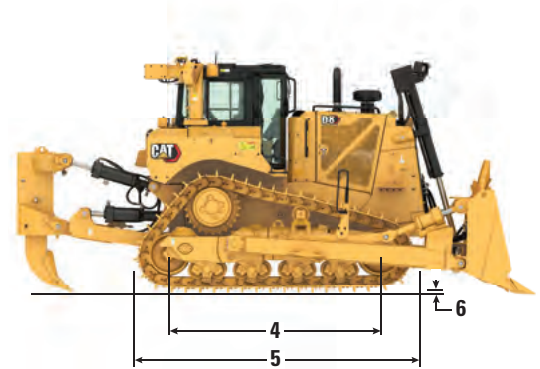

Standard configuration shown.

- Operating Weight – Includes hydraulic controls, tilt cylinder, drawbar, coolant, lubricants, 100% fuel, ROPS, FOPS cab, LGP SU-Blade, 965 mm (38 in) ES shoes, and operator.
- Shipping Weight – Includes coolant, lubricants, 20% fuel, ROPS, FOPS cab, drawbar and 965 mm (38 in) ES shoes.

*When Cat Grade with 3D antennas are installed, overall machine height increases by approximately 50 mm (2 in).

Blades – D8 LGP

	Capacity	Width*	Width Over End Bits	Height	Dig Depth	Ground Clearance	Maximum Tilt	Blade Weight* (without hydraulic controls)
	m ³ (yd ³)	mm (ft)	mm (ft)	mm (ft)	mm (in)	mm (in)	mm (in)	kg (lb)
LGP SU	9.9 (12.9)	4402 (14.4)	4543 (14.9)	1622 (5.3)	575 (22.64)	1228 (48.35)	859 (33.82)	4703 (10,368)
LGP Angle	5.6 (7.3)	5041 (16.5)	5553 (18.2)	1177 (3.9)	625 (24.61)	1323 (52.09)	657 (25.87)	5714 (12,597)

*Includes blade tilt cylinder.

D8 Track-Type Tractor Specifications

Track Shoes

	610 mm (24 in)	660 mm (26 in)	711 mm (28 in)	965 mm (38 in)
Positive Pin Retention (PPR)Track				
Moderate Service	✓	✓	✓	✓
Extreme Service	✓	✓	✓	✓
Super Extreme Service	✓			
Moderate Service Trapezoidal			✓	
Extreme Service Trapezoidal	✓	✓	✓	✓
Super Extreme Service Trapezoidal		✓		
Heavy Duty Extended Life				
Extreme Service	✓	✓	✓	✓
Extreme Service Trapezoidal	✓	✓		✓
Super Extreme Service	✓			

Ripper

	Single-Shank, Adjustable Parallelogram		Multi-Shank, Adjustable Parallelogram	
Number of Pockets	1		3	
Overall Beam Width	—		2464 mm	97 in
Maximum Clearance Raised (under tip, pinned in bottom hole)	636 mm	25 in	593 mm	23.4 in
Maximum Penetration (standard tip)	1130 mm	44.4 in	780 mm	30.7 in
Maximum Penetration Force (shank vertical)	127.3 kN	28,620 lb	124.2 kN	27,920 lb
Pry out Force	222.7 kN	50,070 lb	—	—
Pry out Force (Multi-Shank Ripper with one tooth)	—		222.9 kN	51,230 lb
Weight* (without hydraulic controls)	4057 kg	8,944 lb	—	—
Weight				
With One Shank	—		3949 kg	8,706 lb
Each Additional Shank	—		343 kg	756 lb
Total Operating Weight* (with SU-Blade and Ripper)	40 233 kg	88,698 lb	40 125 kg	88,460 lb

* Total Operating Weight: Includes hydraulic controls, blade tilt cylinder, coolant, lubricants, 100% fuel. ROPS, FOPS cab, blade, single-shank 610 mm (24 in) ES shoes, and operator.

Winches

Winch Model	PA140VS		W12E	
Weight*	2136 kg	4,709 lb	2880 kg	6,350 lb
Oil Capacity	15 L	4 gal	121 L	32 gal
Increased Tractor Length	781 mm	30.7 in	669 mm	26.4 in
Winch Length	1614 mm	63.5 in	1485 mm	58.5 in
Winch Case Width	1226 mm	48.3 in	1216 mm	48.0 in
Drum Width	332 mm	13.1 in	281 mm	12.0 in
Flange Diameter	610 mm	24.0 in	635 mm	25.0 in
Recommended Cable Size	29 mm	1.13 in	29 mm	1.13 in
Optimal Cable Size	32 mm	1.25 in	32 mm	1.25 in
Drum Capacity				
Recommended Cable Length	84 m	276 ft	69 m	227 ft
Optional Cable	62 m	204 ft	55 m	181

• PA140VS – Variable speed, hydraulically driven, dual braking system, three roller fairlead.

• W12E – Fixed speed, PTO driven.

*When Cat Grade with 3D antennas are installed, overall machine height increases by approximately 50 mm (2 in).

D8 Track-Type Tractor Specifications

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			CAT TECHNOLOGY		
Cat C15 engine – meets U.S. EPA Tier 4 Final/Korea Tier 5 emission standards	✓		Attachment Ready Option (ARO)		✓
Cat C15 engine – meets EU Stage V emission standards		✓	AutoCarry/AutoRip, single tilt or dual tilt		✓
24V electric start	✓		Cat Grade with 3D		✓
Aftercooler, air-to-air (ATAAC)	✓		Cat Grade with Slope Assist		✓
Air filter, with electronic service indicator	✓		Cat Slope Indicate	✓	
Brakes, Extreme Service		✓	Remote Control Ready		✓
Cat exclusive power train oil filter with extended service intervals	✓		Command for Dozing		✓
Coolant, extended life	✓		Grade Control Ready	✓	
Drains, ecology, power train		✓	Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓	
Engine precleaner with screen		✓	Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓	
Engine, thermal shield		✓	Product Link™ – Cellular or Dual Mode		✓
Fan, suction, auto reversing	✓		OPERATOR ENVIRONMENT		
Four planet, double-reduction planetary final drives	✓		Access/egress lighting with shutdown timer	✓	
Fuel priming pump, electric	✓		Armrests, adjustable	✓	
Full autoshift	✓		Cab glass – enhanced 40 psi		✓
High performance single plane cooling system	✓		Cab glass – enhanced dual pane		✓
Oil change system, high speed		✓	Cab, ROPS/FOPS, sound suppressed	✓	
Parking brake, electronic	✓		Deactivation switch, hydraulic controls	✓	
Precleaner, strata-tube dust ejector	✓		Decelerator pedal	✓	
Prescreener	✓		Governor switch, electronic	✓	
Radiator, 6.35 fins per inch, debris	✓		Heater and ventilation	✓	
Sound attenuated exhaust system	✓		Interior LED courtesy lights	✓	
Starting aid, automatic ether	✓		Mirror, rearview	✓	
Torque divider with lock-up clutch	✓		Provision for wire passage in/out of cab	✓	
Transmission control module, electronic	✓		Radio, AM/FM, Bluetooth®	✓	
Transmission, electronically-controlled powershift	✓		ROPS mounted air conditioner	✓	
Turbocharger	✓		Seat belt, retractable	✓	
Water separator	✓		Seat, cloth, air-suspension	✓	
			Seat, cloth, heated		✓
			Seat, heated and ventilated		✓
			Touchscreen operator interface	✓	
			Visibility arrangement – mirrors		✓
			Visibility arrangement – single camera		✓
			Window shades		✓
			Wipers, intermittent	✓	

(continued on next page)

D8 Track-Type Tractor Specifications

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
UNDERCARRIAGE			HYDRAULICS		
Gauge arrangements – Standard or LGP	✓		Cat exclusive hydraulic oil filter with extended service intervals	✓	
Rollers and idlers, lifetime lubricated	✓		Dozer tilt hydraulics – dual tilt		✓
Sprocket rim segments, replaceable	✓		Dozer tilt hydraulics – single tilt	✓	
Suspension-type undercarriage	✓		Electronically enabled quick drop valve	✓	
8-roller tubular track roller frame (carrier roller ready)	✓		Hydraulics, electronically controlled, load-sensing dozer lift and tilt	✓	
Track adjusters, hydraulic	✓		Hydraulics, electronically controlled, load-sensing rear hydraulics, ripper or winch ready	✓	
Track guide	✓		Hydraulics, independent steering and work tool pumps	✓	
Two-piece master links	✓		Hydraulics, ripper		✓
Positive Pin Retention (PPR) undercarriage – 44 section track, sealed and lubricated, single grouser shoes	✓		Hydraulics, winch		✓
610 mm (24 in) PPR moderate service shoes*	✓		ELECTRICAL		
PPR undercarriage, suspended, guarded		✓	Alarm, back-up	✓	
PPR undercarriage, arctic		✓	Converter, 24V to 12V	✓	
Heavy Duty, Extended Life (HDXL) undercarriage – 44 section track, sealed and lubricated, single grouser shoes		✓	Diagnostic connector	✓	
HDXL undercarriage, suspended		✓	Ground level service center with hour meter	✓	
HDXL undercarriage, suspended, guarded		✓	Horn, forward warning	✓	
HDXL undercarriage, arctic		✓	Light, warning strobe		✓
Carrier rollers, suspended		✓	Light, warning strobe mount		✓
Carrier rollers, suspended – arctic		✓	Lights – premium light package		✓
Carrier rollers, none		✓	Lights – six-light package	✓	
Final drives, standard or LGP	✓		BULLDOZERS		
Final drives, standard or LGP, guarded		✓	8SU/U – basic, guarded or dual tilt guarded		✓
Final drives, standard, arctic		✓	8SU LGP – basic		✓
			8A		✓
			BLADES		
			Semi-Universal (SU)		✓
			Universal		✓
			Angle Blade		✓
			SU Landfill		✓
			Universal Landfill		✓
			Rock Guard		✓
			Wear Plate		✓
			Push Plate		✓
			FirstCut cutting edges (SU blades)		✓

*For optional track shoe offerings, please refer to chart on page 6.

(continued on next page)

D8 Track-Type Tractor Specifications

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
PUSH ARMS			FLUIDS, LUBRICANTS, COOLANTS		
Single tilt, standard	✓		Engine coolant, standard -37°C (-35°F)	✓	
Single tilt, extreme		✓	Engine coolant, arctic -51° C (-60° F)		✓
Dual tilt, standard or extreme		✓	OTHER STANDARD EQUIPMENT		
BOTTOM GUARDS			Equalizer bar, pinned	✓	
Hinged	✓		Front pull device	✓	
Powered		✓	HVAC box – corrosive resistant	✓	
Heavy duty, sealed		✓	Mounting, lift cylinders	✓	
Wood chip		✓	Oil cooler, hydraulic	✓	
Bottom guards with front counterweight		✓	Product Link	✓	
REAR ATTACHMENTS			S·O·S SM sampling ports	✓	
Ripper – single-shank		✓	Steering, electronically controlled power differential	✓	
Ripper – single-shank with pin puller		✓	Vandalism protection for fluid compartments	✓	
Ripper – single-shank with striker bar		✓	Engine compartment service light	✓	
Ripper – single-shank with pin puller and striker bar		✓	GUARDS		
Ripper – multi-shank		✓	Guard, fan debris		✓
Ripper – multi-shank with striker bar		✓	Guard, fast fuel		✓
Counterweight, rear		✓	Guard, fuel tank		✓
Drawbar, rigid		✓	Guard, grill debris		✓
Rear striker bar		✓	Rear screen		✓
Winch, PA140VS, variable speed		✓	Striker bars, front, suspended		✓
Winch, W12E PTO		✓	Sweeps group		✓
STARTERS, BATTERIES, AND ALTERNATORS			OTHER ATTACHMENTS		
Batteries – Heavy Duty	✓		Black paint, blade		✓
Batteries – Arctic		✓	Grab handles, push arm		✓
Alternators – 150 Amp	✓				
Alternators – 150 Amp, ducted		✓			
Starting aids – engine heaters		✓			
Heater, engine coolant (120V)		✓			

D8 Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The Cat® C15 engine meets U.S. EPA Tier 4 Final, EU Stage V and Korea Tier 5 emissions standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 2.5 kg (5.5 lb) of refrigerant which has a CO2 equivalent of 3.575 metric tonnes (3.940 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

For machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that adopt the "EU Directives".

Operator Sound Pressure Level (ISO 6396:2008) – 76 dB(A)

Exterior Sound Power Level (ISO 6395:2008) – 113 dB(A)

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Move up to 18% more material per hour than the previous D8T model
 - Fully automatic 4-speed powershift transmission continuously adjusts for maximum efficiency
 - Engine Idle Shutdown Timer reduces fuel burn, carbon emissions and unnecessary idle time by shutting down the machine after a pre-set idling period
 - Emissions reduction technology is designed to operate automatically in the background while you work
 - AutoCarry™ automates blade lift to reduce track slip for maximum efficiency on each pass to help lower fuel burn and carbon emissions
 - Boost productivity with Cat technologies like Cat Grade with Slope Assist and Cat Grade with 3D
 - Remote Flash and Remote Troubleshoot

Recycling

- The materials included in machines are categorized as below with approximate weight percentage. Because of variations of product configurations, the following values in the table may vary.

Material Type	Weight Percentage
Steel	81.73%
Iron	8.11%
Nonferrous Metal	1.82%
Mixed Metal	0.24%
Mixed-Metal & Nonmetal	1.26%
Plastic	0.42%
Rubber	0.13%
Mixed Nonmetallic	0.09%
Fluid	0.58%
Other	0.67%
Uncategorized	4.95%
Total	100%

- A machine with higher recyclability rate will ensure more efficient usage of valuable natural resources and enhance End-of-Life value of the product. According to ISO 16714 (Earthmoving machinery – Recyclability and recoverability – Terminology and calculation method), recyclability rate is defined as percentage by mass (mass fraction in percent) of the new machine potentially able to be recycled, reused, or both.

All parts in the bill of material are first evaluated by component type based on a list of components defined by the ISO 16714 and Japan CEMA (Construction Equipment Manufacturers Association) standards. Remaining parts are further evaluated for recyclability based on material type.

Because of variations of product configurations, the following value in the table may vary.

Recyclability – 98%



D8

Waste Handler

From pushing trash to spreading cover, and cell construction to closing, Cat Waste Handlers are designed and manufactured from the frame up to take on the demands of landfill work. Specialized guarding throughout the machine helps protect major components like the chassis, fuel tank and hydraulic tank from impact and airborne debris.

Added Machine Protection

- Optional Cab with enhanced dual pane glass, powered air precleaner and high efficiency filter offer higher cab pressurization for a cleaner cab and better operator comfort.
- Fuel tank guard and heavy duty bottom guards shield major machine components.
- Internal sealing keeps the trash away from the inner compartments.
- Heavy duty hinged radiator grill doors protect radiator and fan from penetration by material coming straight in or from under the blade.
- Laminated thermal shields on engine and aftertreatment provide added thermal protection in high debris applications.
- Rear striker bar helps protect against trash climbing up the tracks.
- Final drive guarding helps prevent wire wrap and helps keep dirt and debris away from the Duo-Cone™ seals.
- Pivot shaft seal guards help prevent debris from entering and damaging seals.
- Rotating bushings on tilt cylinder lines help wrapping material to roll off hoses.
- 10 premium LED lights illuminate the work area.

Ease of Maintenance

- Cooling system designed for high debris environments, with automatic reversing fan and swing-out access for cleanout with an air wand.
- Heavy duty sealed bottom guard is hinged for easy cleaning.
- Optional center-opening powered and sealed bottom guard makes cleanout even easier.
- Quick access cab floor option offers toolless access to the floor plate opening.
- Ducted alternator for longer life.
- Engine precleaner with screen delivers cleaner air to the power train.

Equipped for the Job

- Landfill blades are equipped with a trash rack to increase productive capacity when machine works in lighter material like waste.
- Wear plate helps extend blade life.
- Heavy Duty Extended Life (HDXL) undercarriage includes guarded, sealed idlers to help prevent debris such as wire, string or plastic bags from wrapping into seals.
- Press-fit bushings and Positive Pin Retention (PPR) are particularly well suited for impact applications.
- Trapezoidal center-hole track helps eject debris.

D8 Waste Handler Specifications

Engine

Engine Model	Cat® C15	
Emissions	U.S. EPA Tier 4 Final/ EU Stage V/ Korea Tier 5	
Net Power (1900 rpm)		
ISO 9249/SAE J1349	264 kW	354 hp
ISO 9249 (DIN)	359 mhp	
Maximum Power (1600 rpm)		
Engine Power: ISO 14396	294 kW	394 hp
Engine Power: ISO 14396 (DIN)	400 mhp	
Gross Power: SAE J1995:2014	294 kW	394 hp
Bore	137 mm	5.4 in
Stroke	172 mm	6.75 in
Displacement	15.2 L	928 in ³

- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator.
- Net power is tested per ISO 9249:2007 and SAE J1349:2011.
- Engine power is tested per ISO 14396:2002.
- No derating required up to 3566 m (11,700 ft) altitude, beyond 3566 m (11,700 ft) automatic derating occurs.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

Service Refill Capacities

Fuel Tank	627 L	165 gal
Diesel Exhaust Fluid Tank	24 L	6.3 gal
Cooling System	86 L	22.7 gal
Engine Crankcase*	38 L	10.0 gal
Power Train	155 L	41.0 gal
Final Drives (each)	12.5 L	3.3 gal
Roller Frames (each)	65 L	17.2 gal
Pivot Shaft Compartment	40 L	10.6 gal
Hydraulic Tank	75 L	19.8 gal

* With oil filter.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 2.5 kg of refrigerant which has a CO₂ equivalent of 3.575 metric tonnes.

Hydraulic Controls


Pump Type	Piston-type, Variable Displacement	
Pump Output (Steering)	284 L/min	75 gal/min
Pump Output (Implement)	244 L/min	64 gal/min
Tilt Cylinder Rod End Flow	132 L/min	35 gal/min
Tilt Cylinder Head End Flow	170 L/min	45 gal/min
Bulldozer Relief Valve Setting	24 000 kPa	3,480 psi
Tilt Cylinder Relief Valve Setting	24 000 kPa	3,480 psi
Ripper (Lift) Relief Valve Setting	24 000 kPa	3,480 psi
Ripper (Pitch) Relief Valve Setting	24 000 kPa	3,480 psi
Steering	43 000 kPa	6,240 psi

- Steering Pump output measured at 2,364 rpm (pump speed) and 30 000 kPa (4,351 psi).
- Implement Pump output measured at 1,900 rpm and 6895 kPa (1,000 psi).
- Electro-hydraulic pilot valve assists operations of ripper and dozer controls. A standard hydraulic system includes four valves.
- Complete system consists of pump, tank, filter, oil cooler, valves, lines, and control levers.

D8 Waste Handler Specifications

Transmission

1 Forward	3.5 km/h	2.2 mph
1.5 Forward	4.8 km/h	3.0 mph
2 Forward	6.6 km/h	4.1 mph
3 Forward	11.3 km/h	7.0 mph
1.5 Reverse	4.8 km/h	3.0 mph
2.0 Reverse	6.4 km/h	4.0 mph
2.5 Reverse	8.7 km/h	5.4 mph
3.0 Reverse	11.8 km/h	7.3 mph
Drawbar Pull		
1 Forward	659.2 kN	148,200 lbf
1.5 Forward	490.8 kN	110,350 lbf
2 Forward	366.1 kN	82,300 lbf
3 Forward	205.8 kN	46,250 lbf

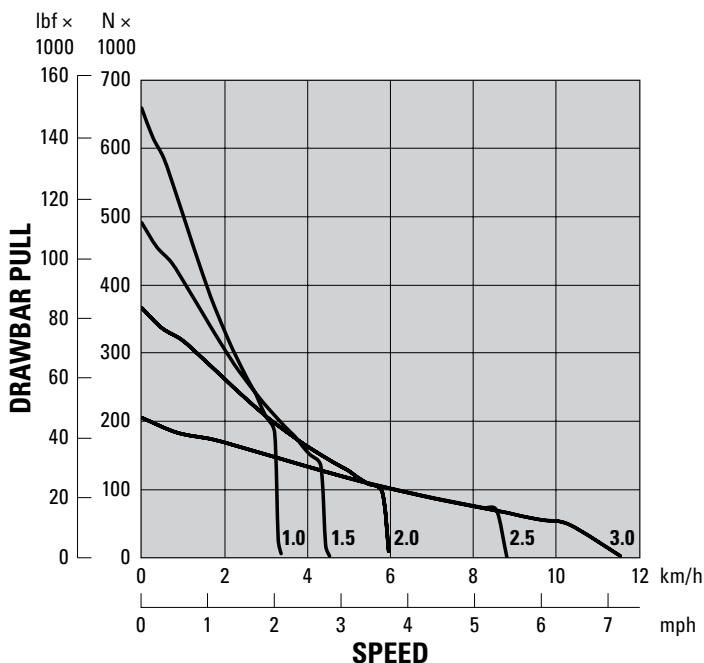

Standards

Sound Level Information

- Hearing protection may be needed when the machine is operated with an open operator station, in a noisy environment, with a cab that is not properly maintained, or when the doors and windows are open for extended periods of time.

Sound Level		Test Method	
Operator Sound Pressure Level	D8	76 dB(A) *	"ISO 6396:2008" ⁽¹⁾
Exterior Sound Pressure Level	D8	114 dB(A)	"ISO 6395:2008" ⁽²⁾
		113 dB(A) *	"ISO 6395:1988" ⁽²⁾

* Including machines required to meet applicable regional regulations of Ukraine, United Kingdom, and Countries that Adopt the "EU Directives"; or machines equipped with the sound-suppression package.

⁽¹⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds. The measurement was conducted with the cab doors and the cab windows closed. The cab was properly installed and maintained.

⁽²⁾The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.

The sound levels listed above include both measurement uncertainty and uncertainty due to production variation.

ROPS/FOPS

- Rollover Protective Structure (ROPS) meets the following criteria: ISO 3471:2008.
- Falling Object Protective Structure (FOPS) meets the following criteria: ISO 3449:2005 Level II.

Brakes

- Crawler Machine Brake Requirements meets the following criteria: ISO 10265:2008.

D8 Waste Handler Specifications



D8 Waste Handler

Operating Weight	40 010 kg	88,206 lb
Shipping Weight	34 227 kg	75,457 lb
Ground Pressure (ISO 16754)	90.8 kPa	13.2 psi
Shoe Type	Extreme Service Trapezoidal	
Width of Shoe	610 mm	24 in
Shoes/Side	44	
Track Rollers per Side	8	
Ground Contact Area (ISO 16754)	4.32 m ²	6,697 in ²
1 Track Gauge	2083 mm	82 in
2 Width of Tractor (without trunnions)	2693 mm	106 in
3 Machine Height from Tip of Grouser to top of Exhaust Stack	3475.5 mm	136.8 in
Top of Cab*	3498.5 mm	137.7 in
Top of Guardrail	3608.5 mm	142 in
4 Length of Track on Ground	3210 mm	126.4 in
5 Length of Basic Tractor	4647 mm	183.0 in
With the following attachments add	4647 mm	183.0 in
Striker bar box (without counterweights) (Add additional 114 mm (4.5 in) per counterweight)	410 mm	16.1 in
Single Shank Ripper (with tip at ground line)	1519 mm	59.8 in
Multi-Shank Ripper (with tip at ground line)	1613 mm	63.5 in
Drawbar	406 mm	16.0 in
SU Blade	1904 mm	75.0 in
U Blade	2241 mm	88.2 in
Pitch	216 mm	8.5 in
6 Grouser Height	84 mm	3.3 in
7 Ground Clearance	622 mm	24.4 in

- Operating Weight – Standard: Includes hydraulic controls, tilt cylinder, coolant, lubricants, 100% fuel, ROPS, FOPS cab, Waste Package, Waste SU-Blade, striker box, 610 mm (24 in) ES shoes and operator.
- Shipping Weight – Standard: Includes hydraulic controls, coolant, lubricants, 20% fuel, ROPS, FOPS cab, Waste Package, striker box, 610 mm (24 in) ES shoes.

*When Cat Grade with 3D antennas are installed, overall machine height increases by approximately 50 mm (2 in).



Please see Landfill Blade information on page 16.

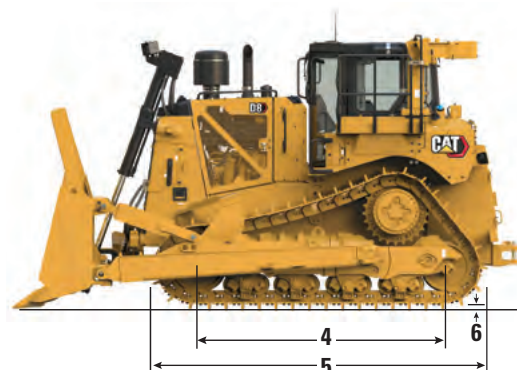

D8 Waste Handler Specifications

D8 LGP Waste Handler

Operating Weight	42 489 kg	93,672 lb
Shipping Weight	36 728 kg	80,971 lb
Ground Pressure (ISO 16754)	61.0 kPa	8.8 psi
Shoe Type	Extreme Service Trapezoidal	
Width of Shoe	965 mm	38 in
Shoes/Side	44	
Track Rollers per Side	8	
Ground Contact Area (ISO 16754)	6.84 m ²	10,594 in ²
1 Track Gauge	2337 mm	92.0 in
2 Width of Tractor (without trunnions)	3302 mm	130.0 in
3 Machine Height from Tip of Grouser to top of Exhaust Stack	3475.5 mm	136.8 in
Top of Cab*	3498.5 mm	137.7 in
Top of Guardrail	3608.5 mm	142.1 in
4 Length of Track on Ground	3210 mm	126.4 in
5 Length of Basic Tractor	4647 mm	183.0 in
Striker bar box(without counterweights) (Add additional 114 mm (4.5 in) per counterweight)	410 mm	16.1 in
Drawbar	406 mm	16.0 in
SU Blade	1904 mm	75.0 in
Pitch	216 mm	8.5 in
6 Grouser Height	84 mm	3.3 in
7 Ground Clearance	622 mm	24.4 in

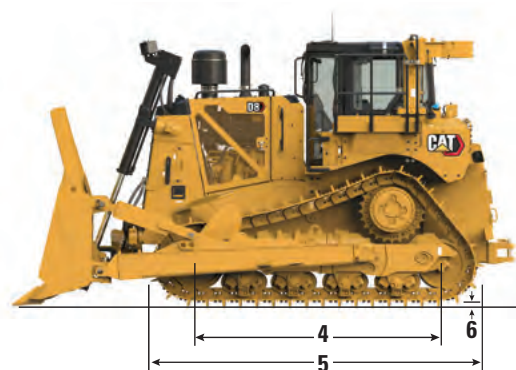

Standard configuration shown.

- Operating Weight – LGP: Includes hydraulic controls, tilt cylinder, striker box, coolant, lubricants, 100% fuel, ROPS, FOPS cab, Waste Package, Waste SU-Blade, 965 mm (38 in) ES shoes, striker box, and operator.
- Shipping Weight – LGP: Includes hydraulic controls, coolant, lubricants, 20% fuel, ROPS, FOPS cab, Waste Package, striker box and 965 mm (38 in) ES shoes.

*When Cat Grade with 3D antennas are installed, overall machine height increases by approximately 50 mm (2 in).

Please see Landfill Blade information on page 16.

D8 Waste Handler Specifications

Landfill Blades

	SU Landfill with Wear Plate		Universal Landfill		LGP SU Landfill	
Capacity	21.2 m ³	27.8 yd ³	23.4 m ³	30.6 yd ³	22.2 m ³	29.0 yd ³
Width*	3900 mm	12.8 ft	4123 mm	13.5 ft	4402 mm	14.4 ft
Width over End Bits	4042 mm	13.3 ft	4265 mm	14.0 ft	4543 mm	14.9 ft
Height	2553 mm	8.4 ft	2544 mm	8.3 ft	2454 mm	8.0 ft
Digging Depth	573 mm	22.56 in	573 mm	22.56 in	575 mm	22.64 in
Ground Clearance	1255 mm	49.41 in	1230 mm	48.43 in	1228 mm	48.35 in
Maximum Tilt	895 mm	35.24 in	968 mm	38.11 in	859 mm	33.82 in
Weight* without hydraulic controls	5251 kg	11,576 lb	5840 kg	12,876 lb	5062 kg	11,159 lb

Track Shoes

	610 mm (24 in)	660 mm (26 in)	711 mm (28 in)	965 mm (38 in)
Positive Pin Retention (PPR)Track				
Moderate Service Trapezoidal			✓	
Extreme Service Trapezoidal	*	*	*	*
Super Extreme Service Trapezoidal		✓		
Heavy Duty Extended Life				
Extreme Service Trapezoidal	✓	✓		✓



✓ – Available for Waste Handlers

* – Recommended for Waste Handlers

D8 Waste Handler Specifications

D8 Waste Handler Features

- 1) Heavy duty hinged radiator grill doors protect radiator and fan from penetration by material coming straight in or from under the blade.
- 2) Cooling system designed for high debris environments, with automatic reversing fan and swing-out access for cleanout with an air wand.
- 3) Laminated thermal shields on engine and aftertreatment provide added thermal protection in high debris applications.
- 4) Fuel tank guard helps shield major machine components. Internal sealing keeps the trash away from the inner compartments.
- 5) Rear striker bar helps protect against trash climbing up the tracks.
- 6) Heavy duty sealed bottom guard is hinged for easy cleaning. Optional center-opening powered bottom guard makes cleanout even easier.
- 7) Rotating bushings on tilt cylinder lines help wrapping material to roll off hoses.

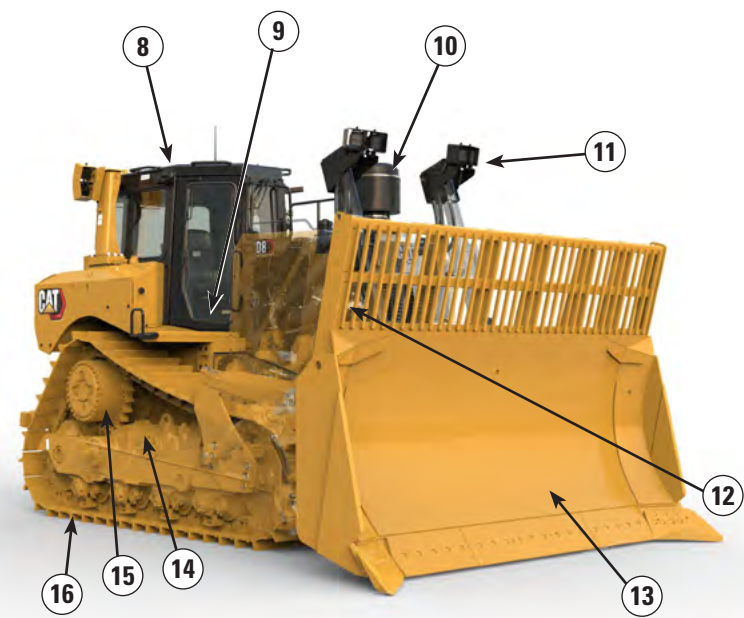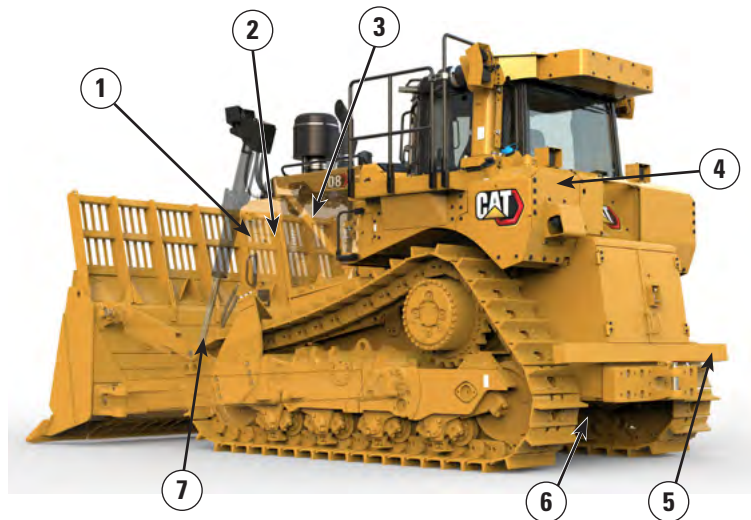

- 8) Optional Cab with enhanced dual pane glass, powered air precleaner and high efficiency filter offer higher cab pressurization for a cleaner cab and better operator comfort.
- 9) Quick access cab floor option offers tool-less access to the floor plate opening.
- 10) Engine precleaner with screen delivers cleaner air to the power train.
- 11) 10 premium LED lights illuminate the work area.
- 12) Ducted alternator for longer life.
- 13) Landfill blades are equipped with a trash rack to increase productive capacity when machine works in lighter material like waste. Wear plate helps extend blade life.

- 14) Pivot shaft seal guards help prevent debris from entering and damaging seals.
- 15) Final drive guarding helps prevent wire wrap and helps keep dirt and debris away from the Duo-Cone™ seals.
- 16) Waste Handler Undercarriage:
 - Heavy Duty Extended Life (HDXL) undercarriage includes Kevlar® guarded, sealed idlers to help prevent debris such as wire, string or plastic bags from wrapping into seals.
 - Press-fit bushings and Positive Pin Retention (PPR2) are particularly well suited for impact applications such as forestry, waste, rock, or V-ditching.

D8 Waste Handler Specifications

Ripper

	Single-Shank, Adjustable Parallelogram		Multi-Shank, Adjustable Parallelogram	
	1		3	
Number of Pockets				
Overall Beam Width	—		2464 mm	97 in
Maximum Clearance Raised (under tip, pinned in bottom hole)	636 mm	25 in	593 mm	23.4 in
Maximum Penetration (standard tip)	1130 mm	44.4 in	780 mm	30.7 in
Maximum Penetration Force (shank vertical)	127.3 kN	28,620 lb	124.2 kN	27,920 lb
Pry out Force	222.7 kN	50,070 lb	—	
Pry out Force (Multi-Shank Ripper with one tooth)	—		222.9 kN	51,230 lb
Weight* (without hydraulic controls)	4057 kg	8,944 lb	—	
Weight				
With One Shank	—		3949 kg	8,706 lb
Each Additional Shank	—		343 kg	756 lb
Total Operating Weight* (with SU-Waste Blade and Ripper)	41 346 kg	91,152 lb	41 238 kg	90,914 lb

* Total Operating Weight: Includes hydraulic controls, blade tilt cylinder, coolant, lubricants, 100% fuel. ROPS, FOPS cab, Waste Package, SU-Waste blade, ripper, 610 mm (24 in) ES Trapezoidal shoes, and operator.

Winches

Winch Model	PA140VS		W12E	
Weight*	2136 kg	4,709 lb	2880 kg	6,350 lb
Oil Capacity	15 L	4 gal	121 L	32 gal
Increased Tractor Length	781 mm	30.7 in	669 mm	26.4 in
Winch Length	1614 mm	63.5 in	1485 mm	58.5 in
Winch Case Width	1226 mm	48.3 in	1216 mm	48.0 in
Drum Width	332 mm	13.1 in	281 mm	12.0 in
Flange Diameter	610 mm	24.0 in	635 mm	25.0 in
Recommended Cable Size	29 mm	1.13 in	29 mm	1.13 in
Optimal Cable Size	32 mm	1.25 in	32 mm	1.25 in
Drum Capacity				
Recommended Cable Length	84 m	276 ft	69 m	227 ft
Optional Cable	62 m	204 ft	55 m	181

• PA140VS – Variable speed, hydraulically driven, dual braking system, three roller fairlead.

• W12E – Fixed speed, PTO driven.

*When Cat Grade with 3D antennas are installed, overall machine height increases by approximately 50 mm (2 in).

D8 Waste Handler Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
POWER TRAIN			CAT TECHNOLOGY		
Cat C15 engine – meets U.S. EPA Tier 4 Final/Korea Tier 5 emission standards	✓		Attachment Ready Option (ARO)		✓
Cat C15 engine – meets EU Stage V emission standards		✓	AutoCarry/AutoRip, single tilt or dual tilt		✓
24V electric start	✓		Cat Grade with 3D		✓
4-speed fully automatic transmission	✓		Cat Grade with Slope Assist		✓
Air filter with electronic service indicator	✓		Cat Slope Indicate	✓	
Air-to-air Aftercooler (ATAAC)	✓		Command for Dozing Ready		✓
Auto reversing fan	✓		Grade Control Ready	✓	
Automatic ether starting aid	✓		Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓	
Cat exclusive power train oil filter with extended service intervals	✓		Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓	
Electric fuel priming pump	✓		Product Link™ – Cellular or Dual Mode		✓
Electronic parking brake	✓		OPERATOR ENVIRONMENT		
Electronic transmission control module	✓		Access/egress lighting with shutdown timer	✓	
Electronically-controlled powershift transmission	✓		Adjustable armrests	✓	
Engine precleaner with screen	+		AM/FM, Bluetooth® Radio	✓	
Extended life coolant	✓		Cab glass – enhanced 40 psi		✓
Extreme service brakes		✓	Cab glass – enhanced dual pane		*
Four planet, double-reduction planetary final drives	✓		Deactivation switch for hydraulic controls	✓	
High debris cooling package – 6 fins per inch	✓		Decelerator pedal	✓	
High performance single plane cooling system	✓		Electronic governor switch	✓	
High speed oil change system		✓	Heater and ventilation	✓	
Precleaner, strata-tube dust ejector	✓		Interior LED courtesy lights	✓	
Prescreener	✓		Provision for wire passage in/out of cab	✓	
Sound attenuated exhaust system	✓		Quick opening floor plates	+	
Thermal wrapped engine	+		Rearview mirror	✓	
Torque divider with lock-up clutch	✓		Retractable seat belt	✓	
Turbocharger	✓		ROPS mounted air conditioner	✓	
Water separator	✓		ROPS/FOPS sound suppressed cab	✓	
			Seat – air suspension cloth	✓	
			Seat – heated and ventilated		✓
			Seat – heated cloth		✓
			Touchscreen operator interface	✓	
			Visibility arrangement – mirrors		✓
			Visibility arrangement – single camera		✓
			Window shades		✓
			Wipers, intermittent	✓	

+ Included in Waste Handler Package

* Recommended

+ Included in Waste Handler Package

D8 Waste Handler Standard and Optional Equipment

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
UNDERCARRIAGE			HYDRAULICS		
Standard or LGP undercarriage	✓		Cat exclusive hydraulic oil filter with extended service intervals	✓	
8-roller tubular track roller frame	✓		Dozer tilt hydraulics – dual tilt		✓
Hydraulic track adjusters	✓		Dozer tilt hydraulics – single tilt	✓	
Replaceable sprocket rim segments	✓		Electronically enabled quick drop valve	✓	
Rollers and idlers – lifetime lubricated	✓		Electronically controlled, load-sensing dozer lift and tilt hydraulics	✓	
Suspension-type undercarriage	✓		Electronically controlled, load-sensing rear hydraulics, ripper or winch ready	✓	
Track guide	✓		Independent steering and work tool pumps	✓	
Two-piece master links	✓		Ripper hydraulics		✓
Positive Pin Retention (PPR) undercarriage, suspended, guarded – 44 section track, sealed and lubricated, single grouser shoes	+		Winch hydraulics		✓
610 mm (24 in) PPR extreme service, trapezoidal hole shoes	*		ELECTRICAL		
Heavy Duty, Extended Life (HDXL) undercarriage, suspended guarded – 44 section track, sealed and lubricated, single grouser shoes	+		24V to 12V converter	✓	
Carrier rollers, none	+		Back-up alarm	✓	
Final drives, standard or LGP, guarded	+		Diagnostic connector	✓	
			Forward warning horn	✓	
			Ground level service center with hour meter	✓	
			Lights – premium 10-light package	+	
			Warning strobe light		*
			Warning strobe light mount		*
			BULLDOZERS		
			8SU/U, guarded – single or dual tilt	+	
			8 LGP – single tilt guarded	+	
			BLADES		
			Semi-Universal (SU) Landfill	✓	
			Universal Landfill	✓	
			SU		✓
			Universal		✓
			Angle Blade		✓
			Rock Guard		✓
			Wear Plate		✓
			Push Plate		✓
			FirstCut cutting edges (SU blades)		✓
			* Recommended		
			+ Included in Waste Handler Package		

** For optional track shoe offerings, please refer to chart on page 16.

* Recommended

+ Included in Waste Handler Package

(continued on next page)

D8 Waste Handler Standard and Optional Equipment

Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
PUSH ARMS			FLUIDS, LUBRICANTS, COOLANTS		
Standard	✓		Engine coolant, standard -37° C (-35° F)	✓	
Extreme		✓	Engine coolant, arctic -51° C (-60° F)		✓
BOTTOM GUARDS			OTHER STANDARD EQUIPMENT		
Hinged	✓		Electronically controlled power differential steering	✓	
Powered		✓	Engine compartment service light	✓	
Heavy duty, sealed	+		Front pull device	✓	
REAR ATTACHMENTS			HVAC box – corrosive resistant	✓	
Single-shank ripper		✓	Hydraulic oil cooler	✓	
Single-shank ripper with pin puller		✓	Lift cylinder mounting	✓	
Single-shank ripper with striker bar		✓	Pinned equalizer bar	✓	
Single-shank ripper with pin puller and striker bar		*	S·O·S SM sampling ports	✓	
Multi-shank ripper		✓	Vandalism protection for fluid compartments	✓	
Multi-shank ripper with striker bar		*	GUARDS		
Rear counterweight		✓	Fan debris guard		✓
Rigid drawbar		✓	Fast fuel guard		✓
Rear striker bar		*	Fuel tank guard	+	
Variable speed winch		✓	Grill debris guard		✓
PTO winch		✓	Rear screen		✓
STARTERS, BATTERIES, AND ALTERNATORS			Striker bars, front, suspended		✓
Batteries – Heavy Duty	✓		Sweeps group		✓
Batteries – Arctic		✓	OTHER ATTACHMENTS		
Alternators – 150 Amp	✓		Black painted blade		✓
Alternators – 150 Amp, ducted	+		Push arm grab handles		✓
Starting aids – engine heaters		✓	* Recommended		
Engine coolant heater (120V)		✓	+ Included in Waste Handler Package		

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2022 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ3344-01 (09-2022)
Build Number: 21B
(Aus-NZ, Chile, Eur, N Am,
S. Korea, Turkey)

